

FIG. 1

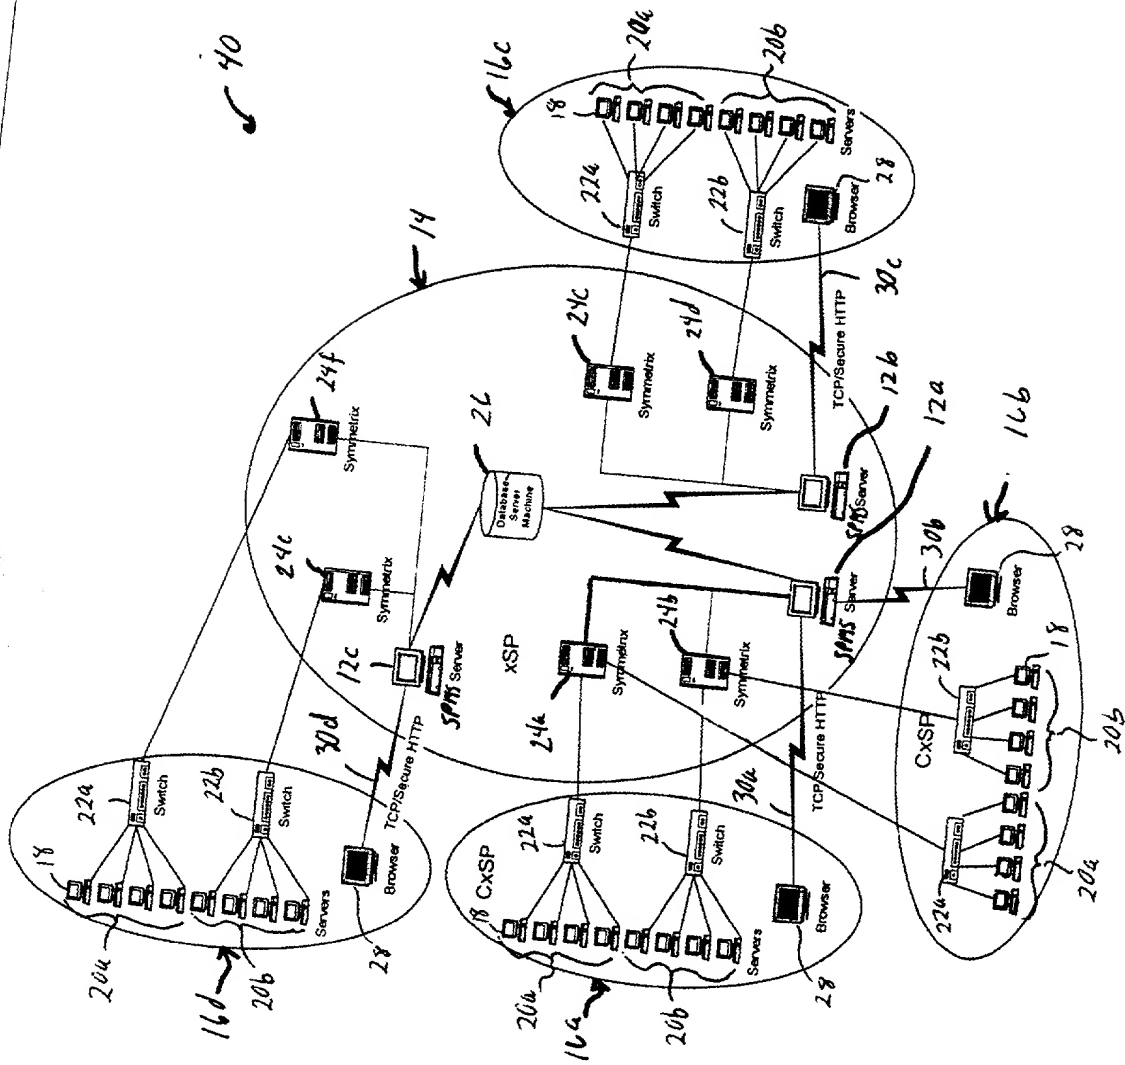


FIG. 2

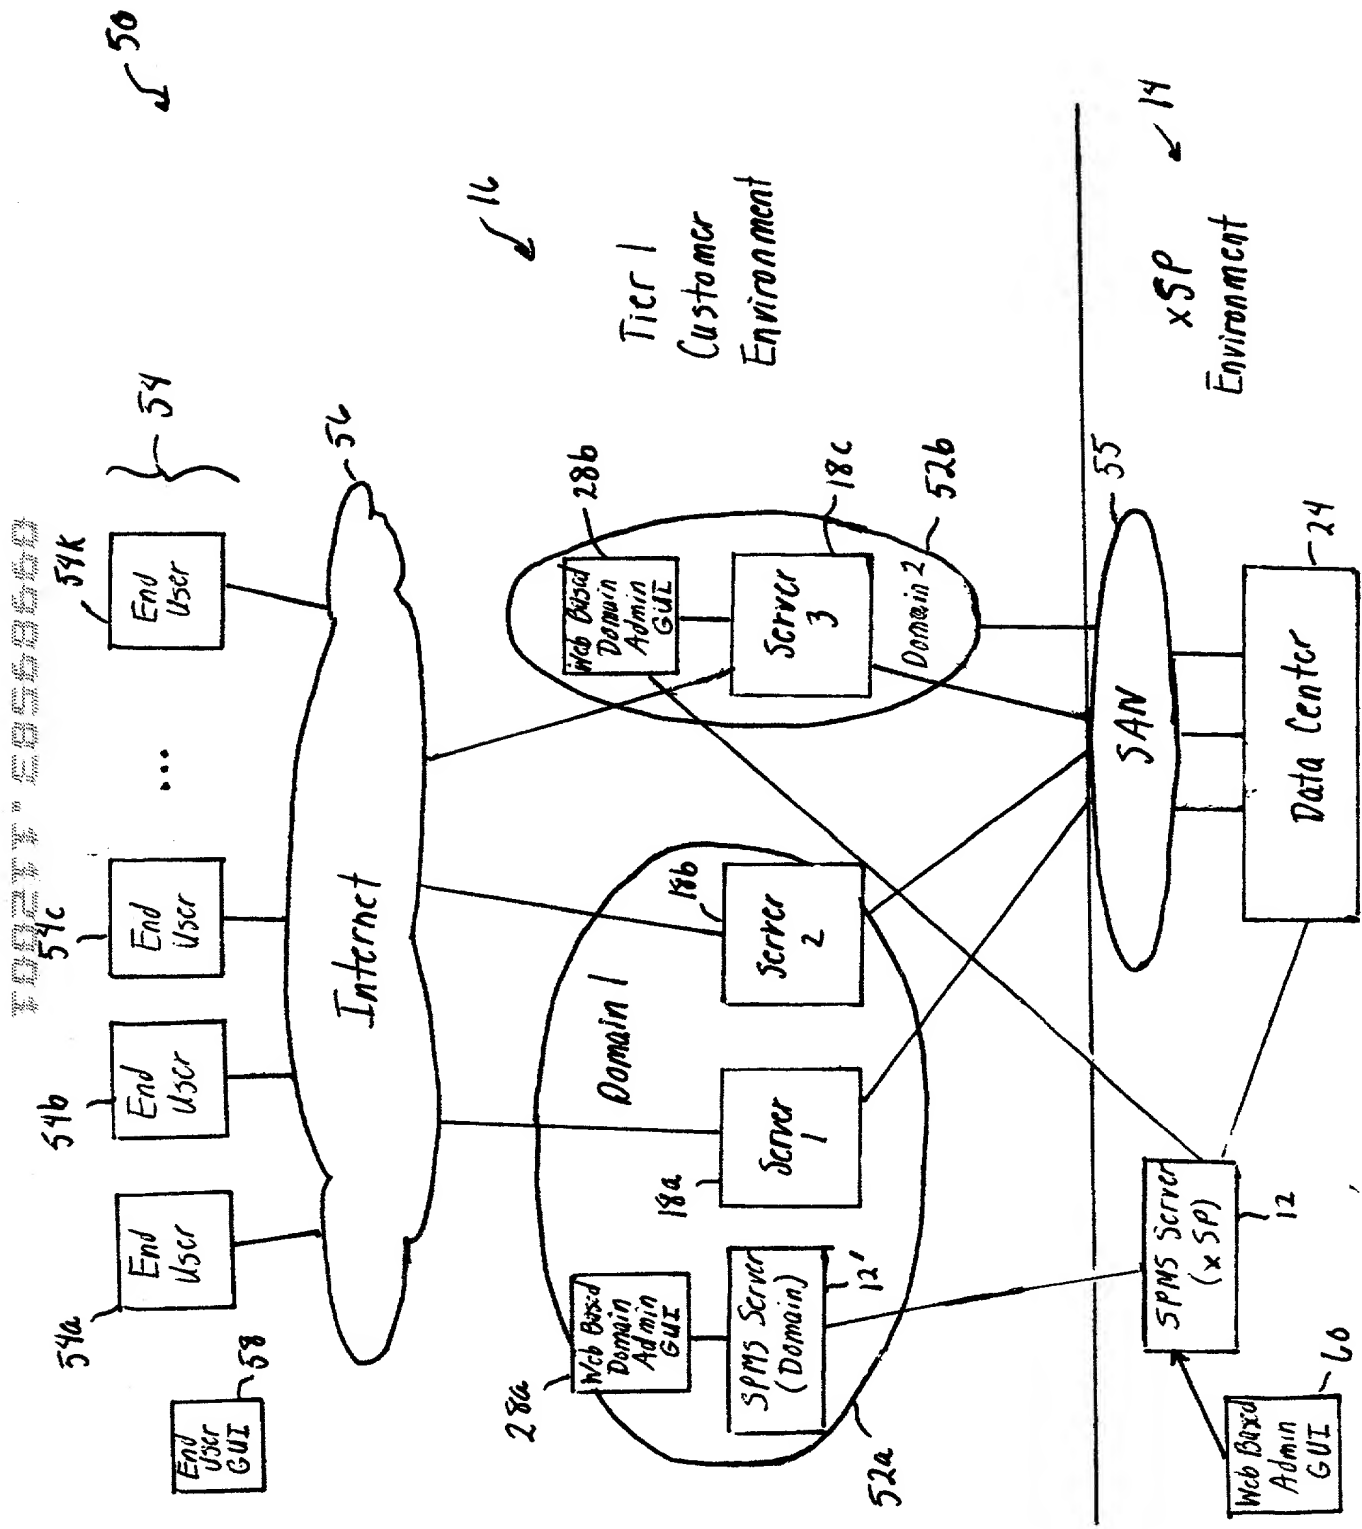


FIG. 3

CxSP Actions

xSP Actions

70

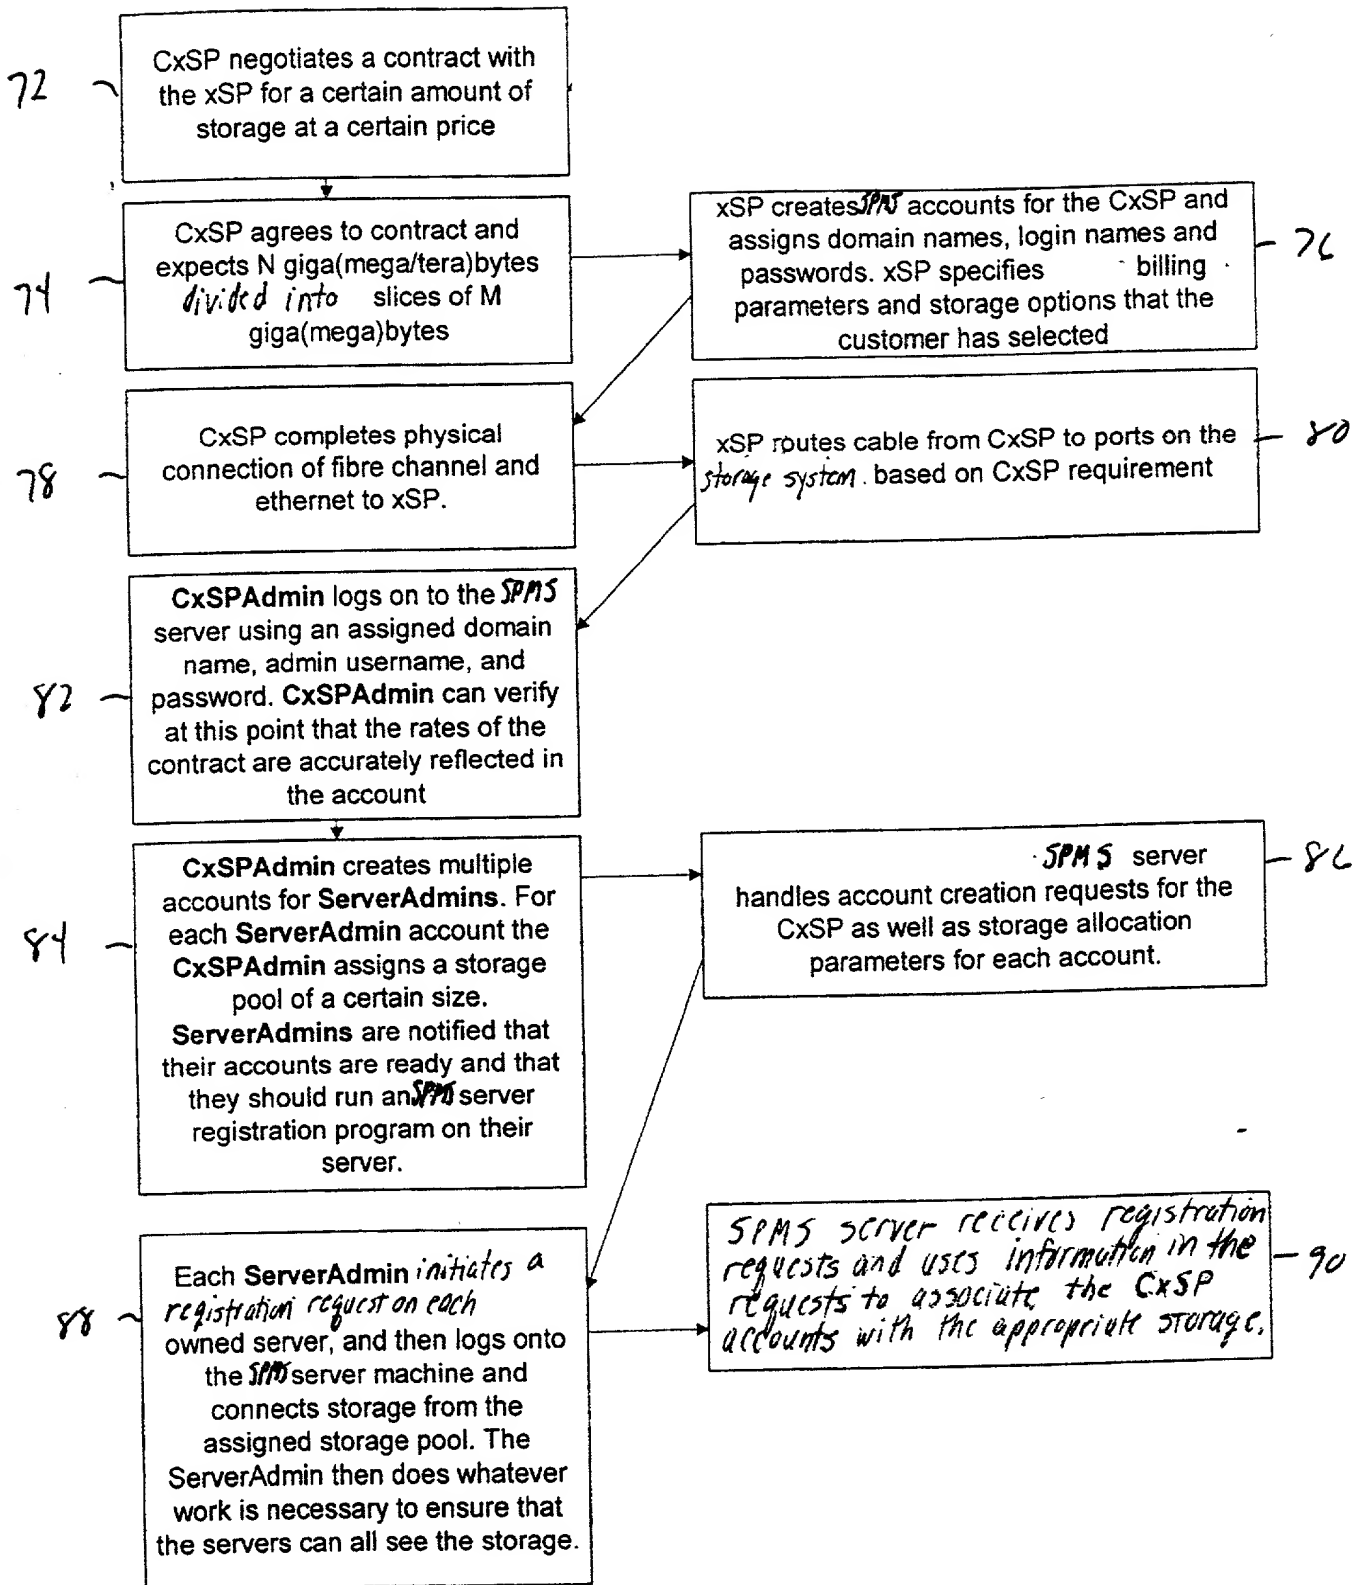


FIG. 4

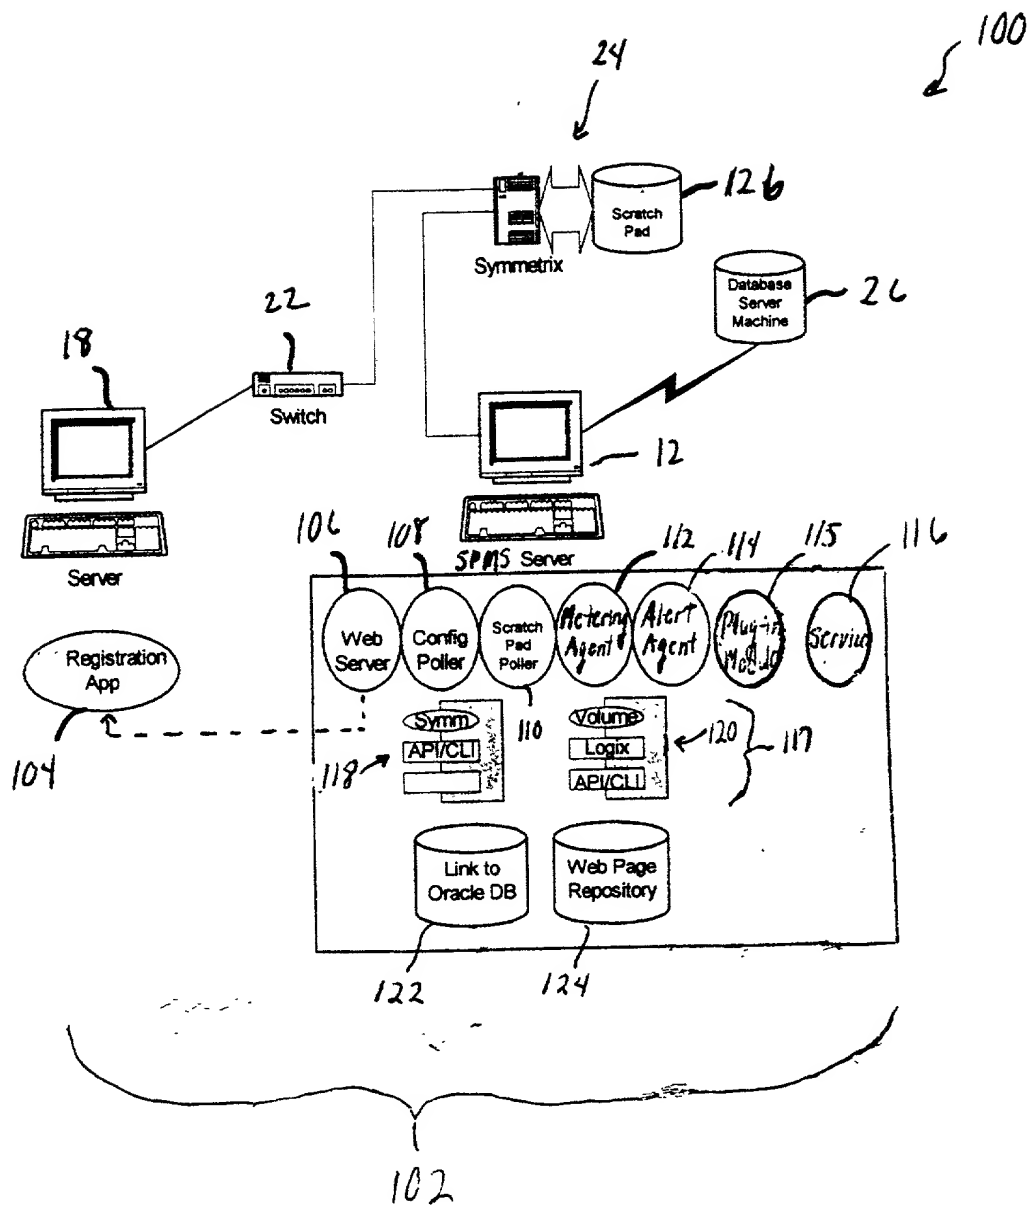


FIG. 5

26

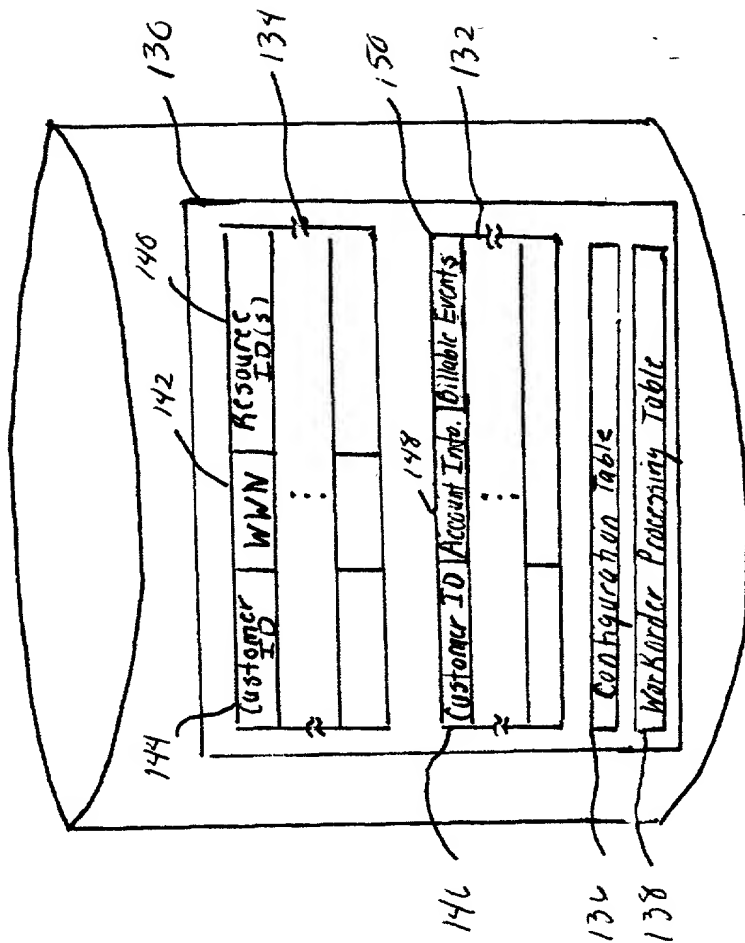


FIG. 6

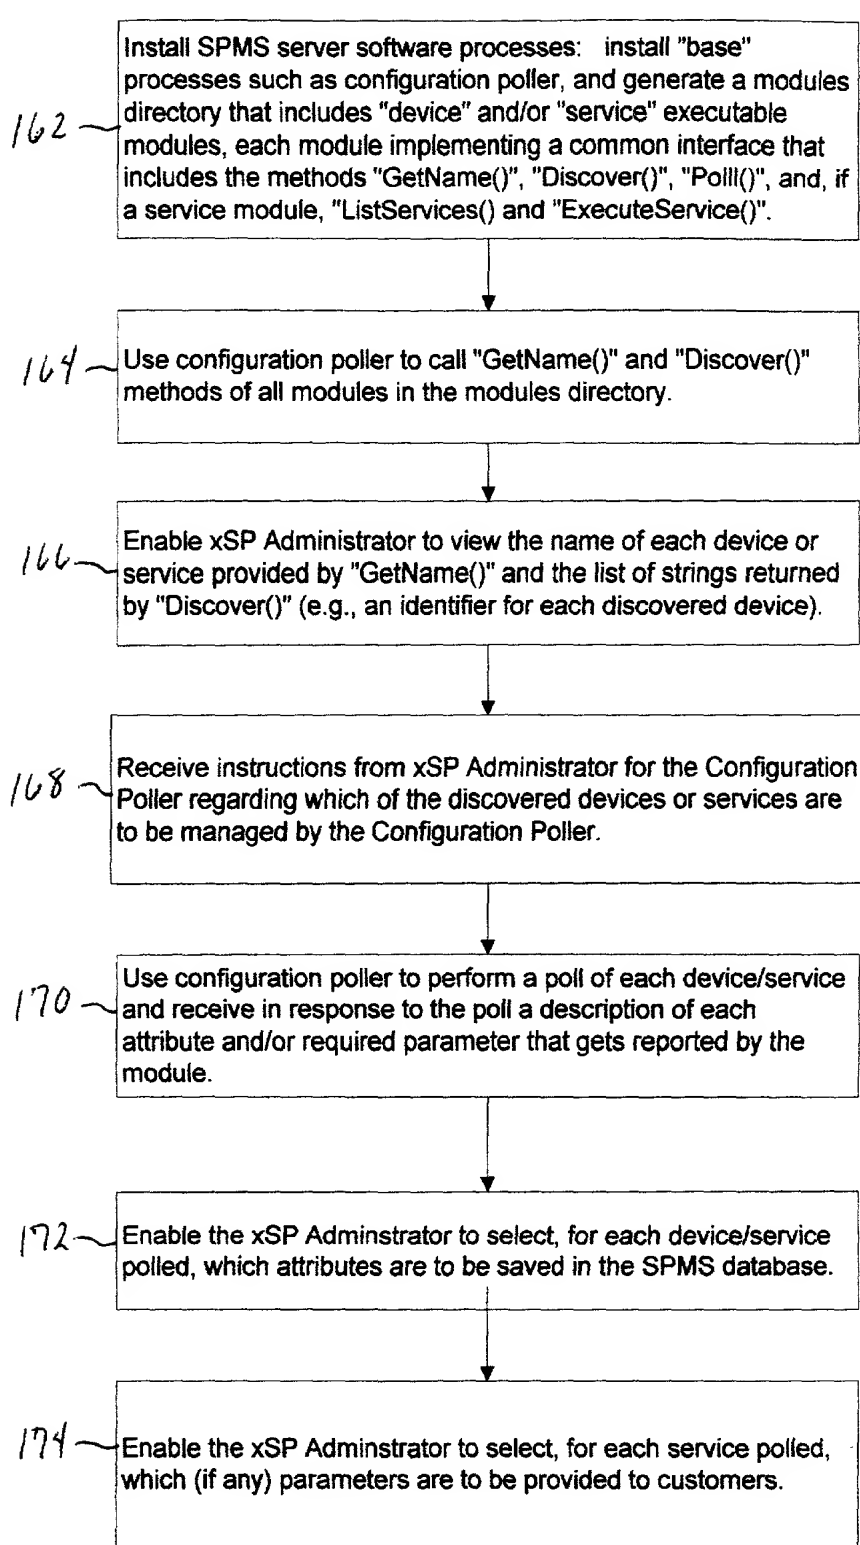


FIG. 7

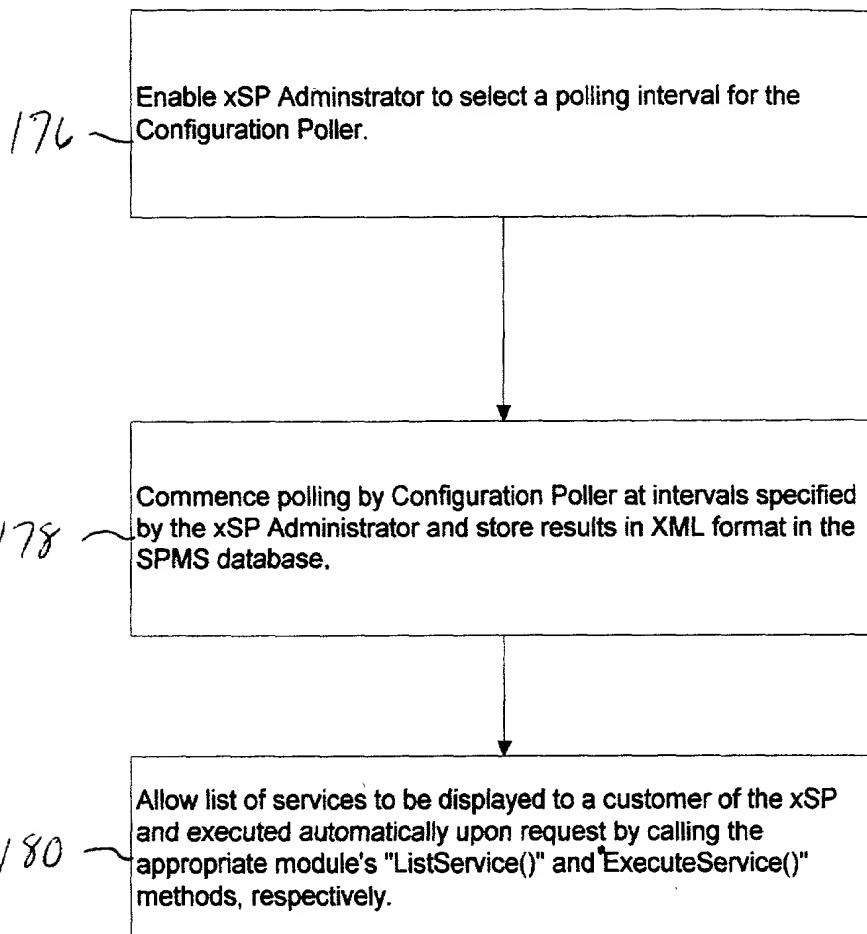


FIG. 7 (Cont'd.)

108

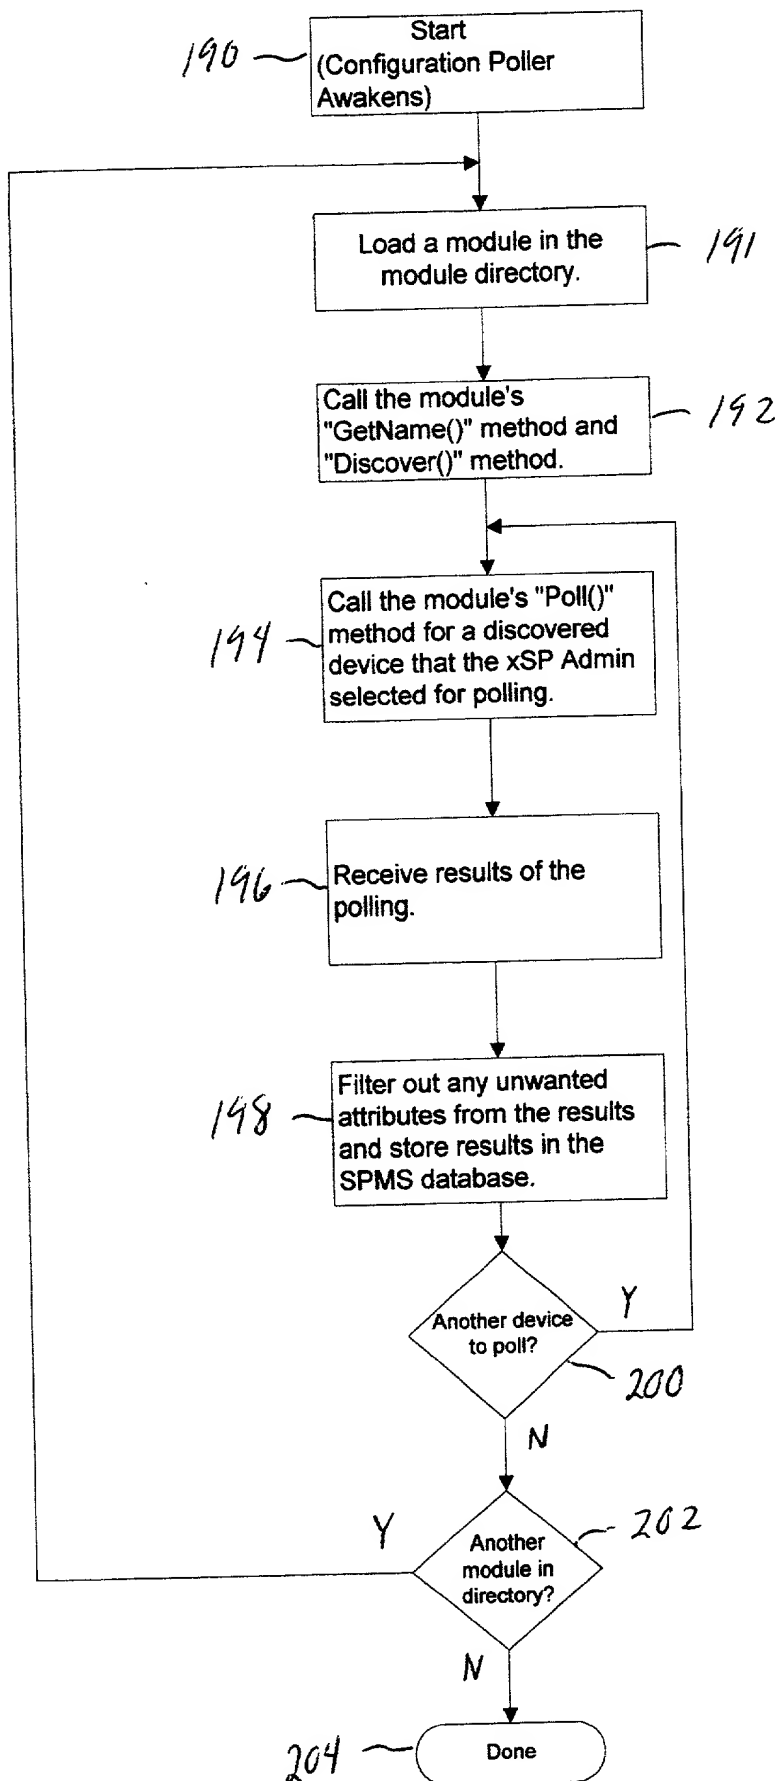


FIG. 8

210

212

Install SPMS server software upgrade, which includes a new module that is defined to communicate with new devices or services that have been added to the datacenter, on SPMS server, the module being placed in the modules directory as part of the installation.

214

Use configuration poller to call "GetName()" and "Discover()" methods of new module in the modules directory.

216

Enable xSP Administrator to view the name of each device or service provided by "GetName()" and the list of strings returned by "Discover()" (e.g., an identifier for each discovered device).

218

Receive instructions from xSP Administrator for the Configuration Poller regarding which of the discovered devices or services are to be managed by the Configuration Poller.

220

Perform same steps as steps 170 through 180 (FIG. 7).

FIG. 9

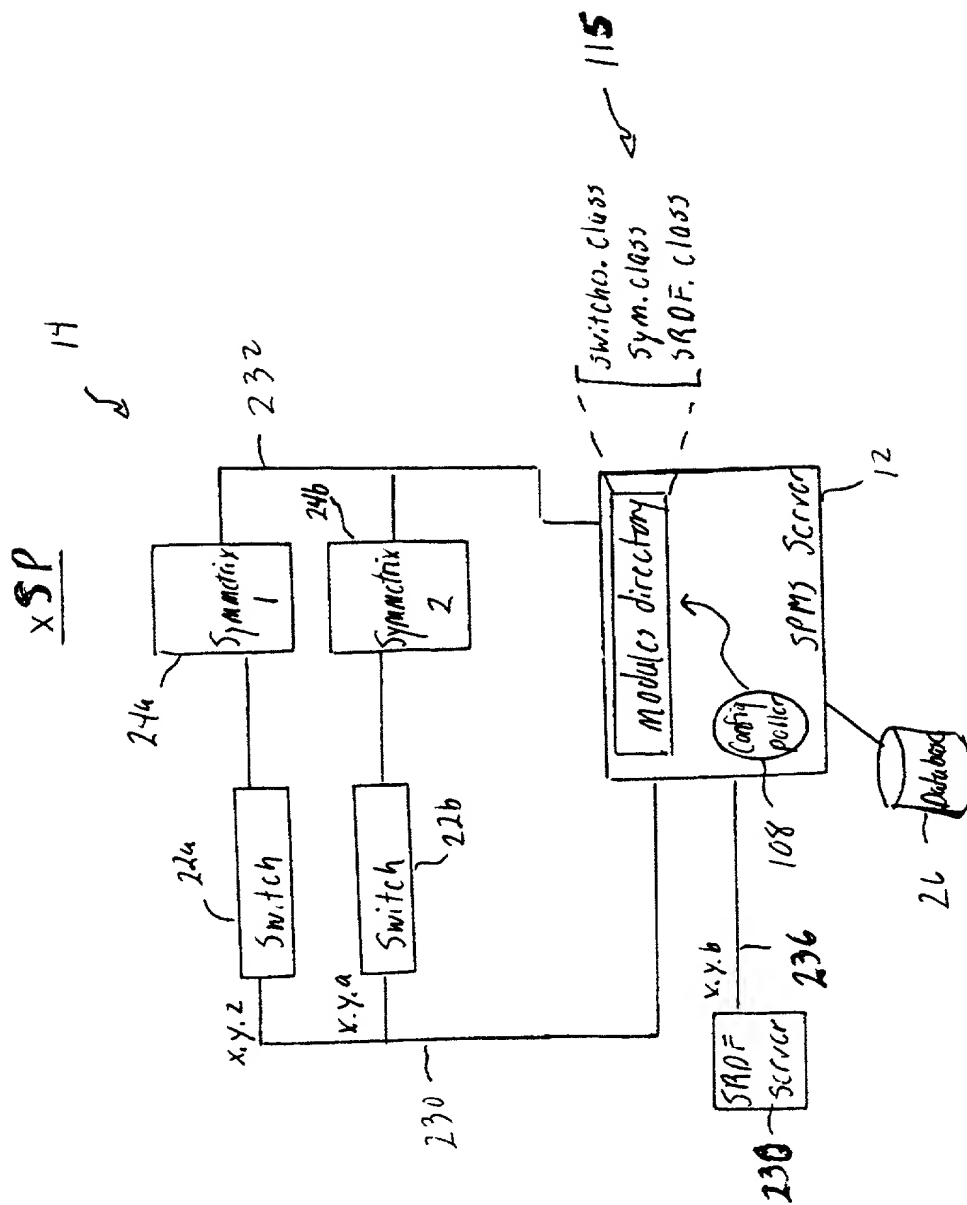


FIG. 10

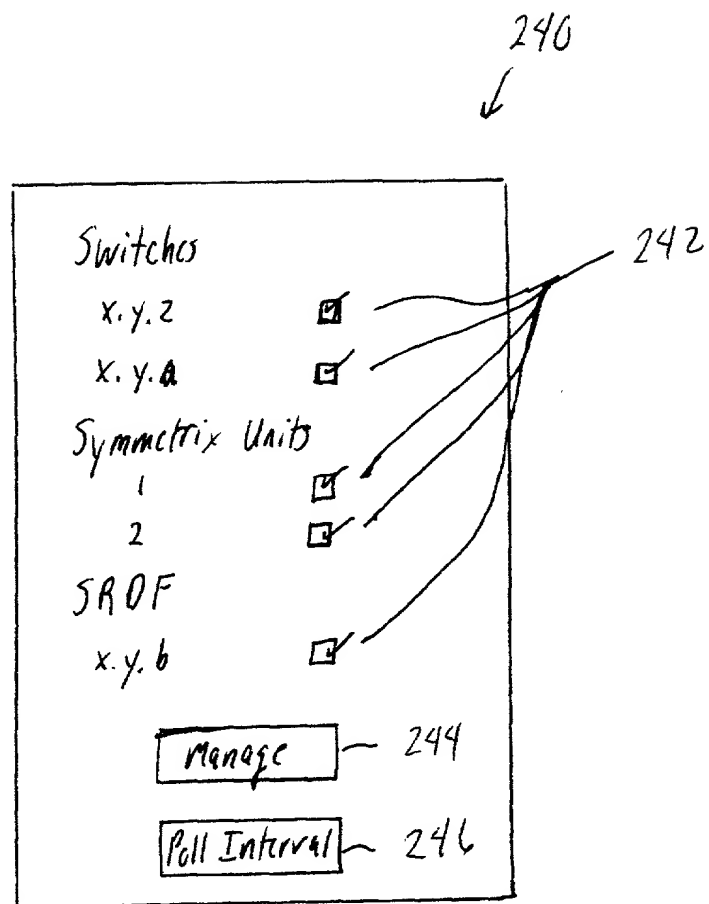


FIG. 11

x 5P

14

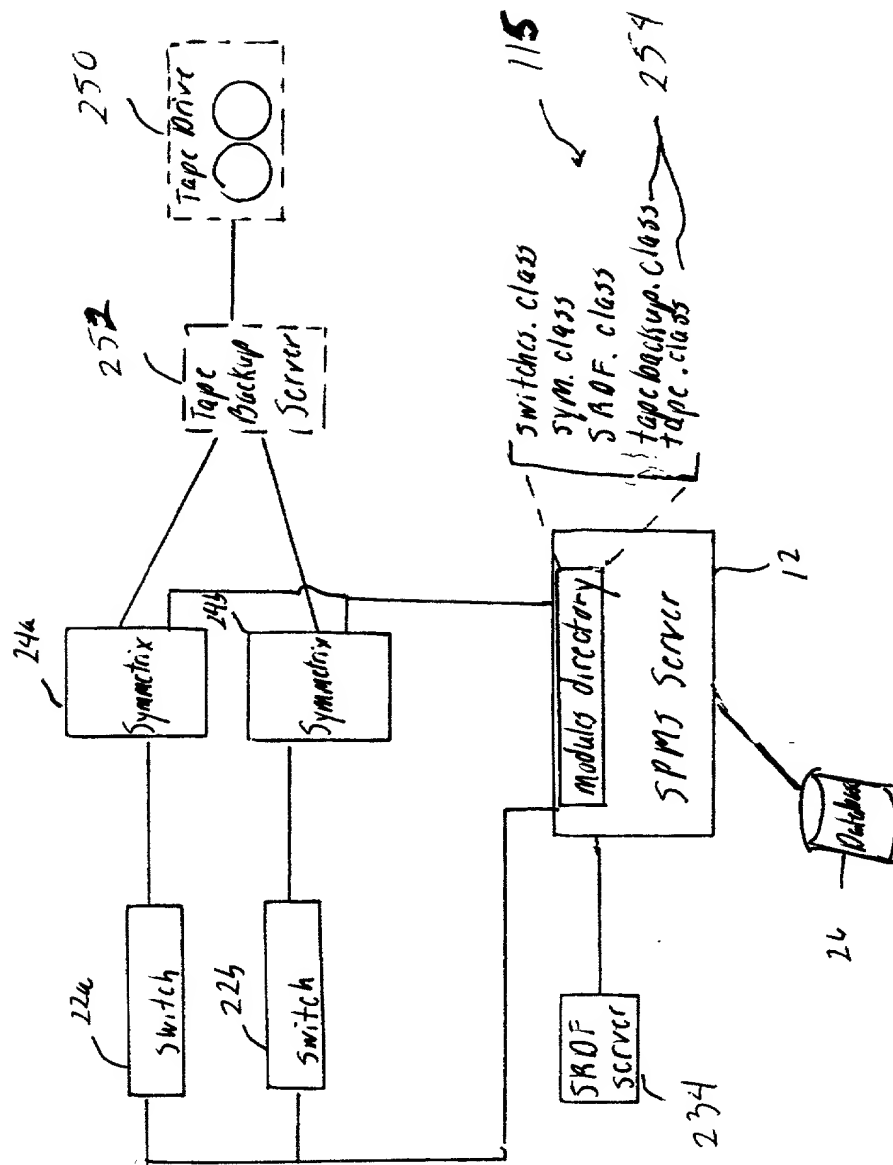


FIG. 12